


Configurator ADAPT-100



Operating temperature limits	10...+40 °C
Ingress protection rating	IP40
Weight with batteries, max	250 g
Batteries (not included)	4 alkaline or lithium AA batteries, 1.5 V
Cable length	0,4 m

- ease of use
- ingress protection IP40
- self-contained power

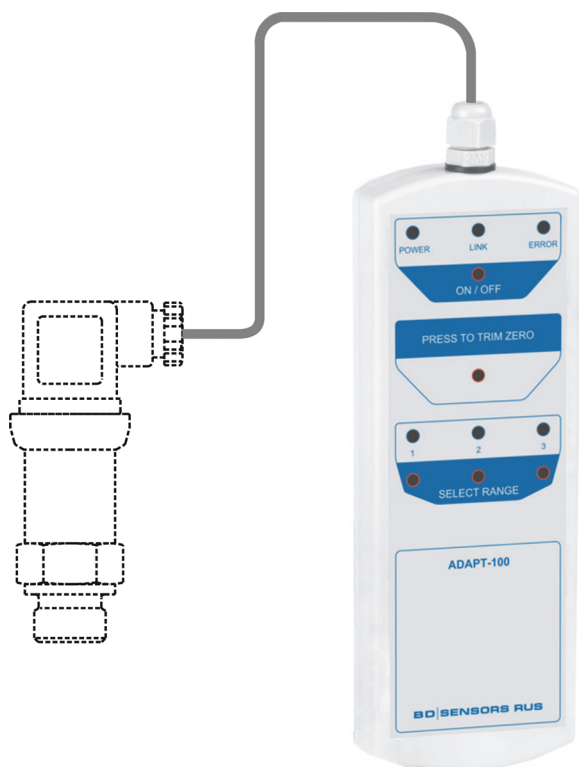

ADAPT-100 configurator allows switching spans of multirange pressure transmitters and adjustment of zero of the analog unified current signal 4 ... 20 mA.

ADAPT-100 has a polycarbonate housing; its enclosure protection rating is IP40. The configurator's cable ends in a DIN 43650 connector that fits 4 ... 20 mA transmitters; there are five control buttons to the device: ON/OFF, ZERO TRIM zero adjustment button and three span selection buttons. There are also six indicators on the configurator's control panel: POWER, LINK, ERROR and three span indicators.

The configurator has two modes of operation: configuration mode and calibration mode.